
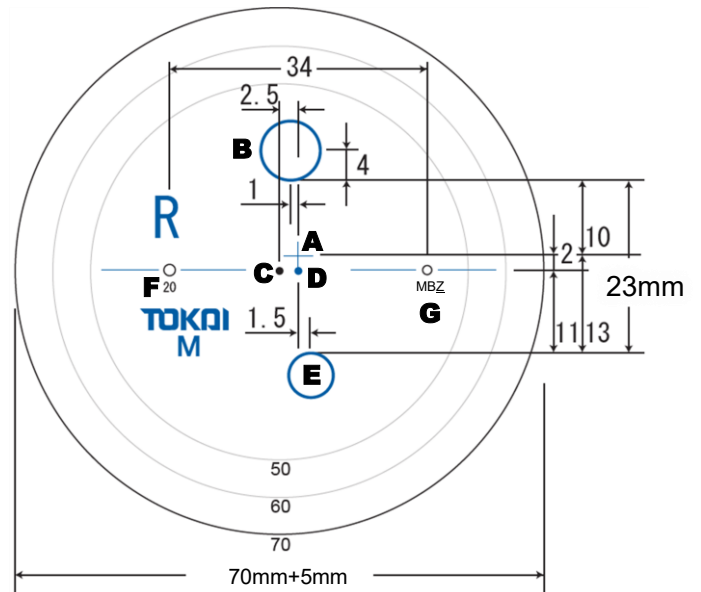
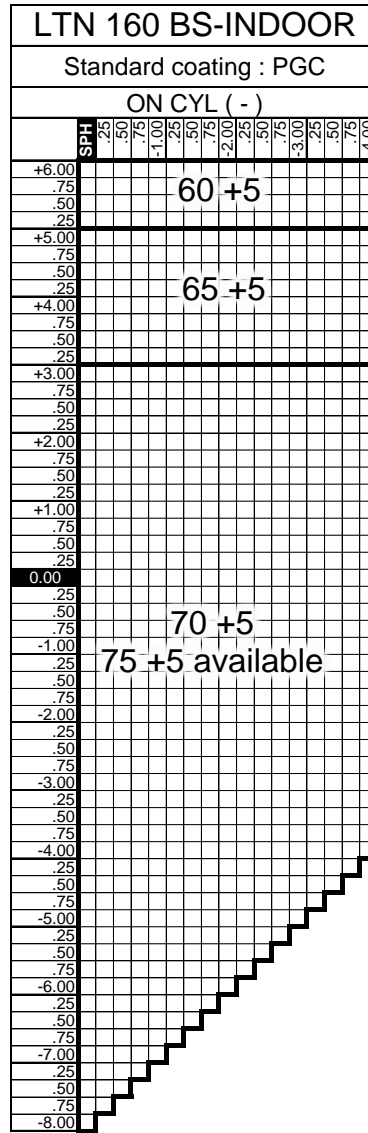
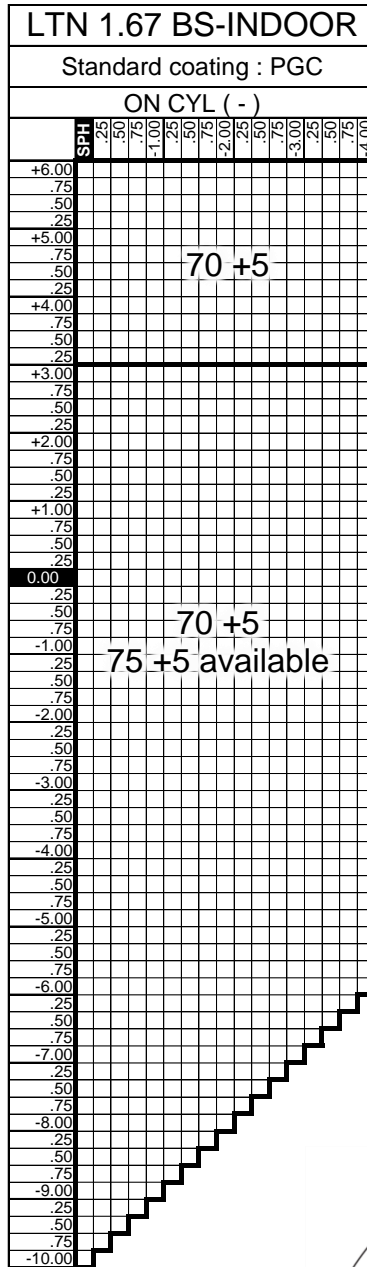


# LUTINA BS-INDOOR

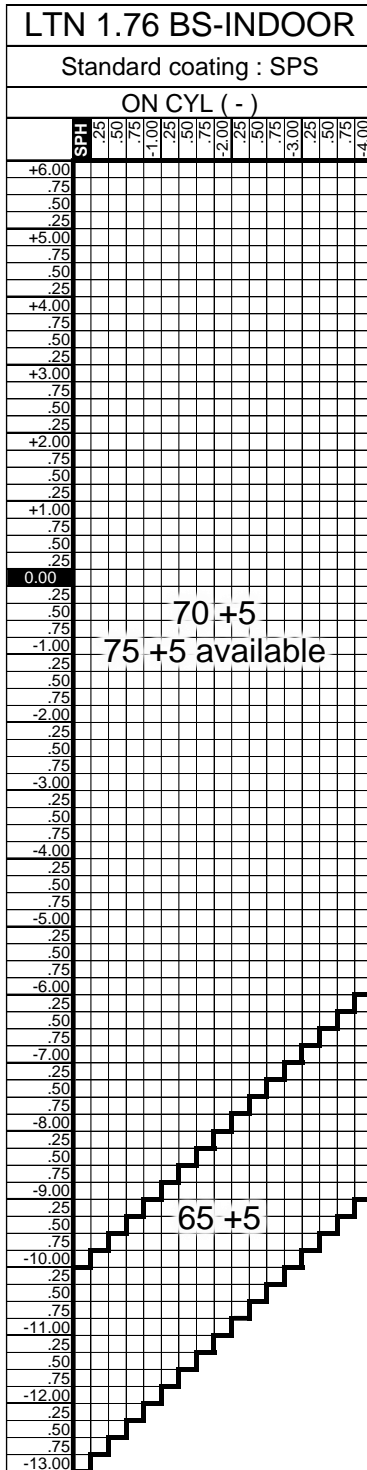

Specifications		Specifiable range / Availability
Prescription	Size reduction	by 50mm Min : only (+), 1mm step
	Prism	Up to 3 prism
	Decentration	Not available
	Base curve selection	Selectable from deep, standard and flat
Progressive	Corridor	23mm 10mm between far EP to area to measure the far power 13mm between far EP to area to measure the near power
	Addition	1.00D to 3.50D at 0.25 steps
	Slice (Frame shape required)	Available for plus & mixed power lenses
Frame data	Fine edge processing	Available (Less S+C = -3.00 : Not available)

Corridor	Curve	Index
M 23mm	A Deep	1.76
	B Standard	1.67
	C Flat	1.60

Lens mark	
A	Fitting point (far vision eye point)
B	Area to measure the far vision power
C	Geometrical center
D	Area to measure the near vision power
E	Addition
F	Inset (0.0 to 5.0 mm at 0.1 mm steps)
G	Identification and location mark