
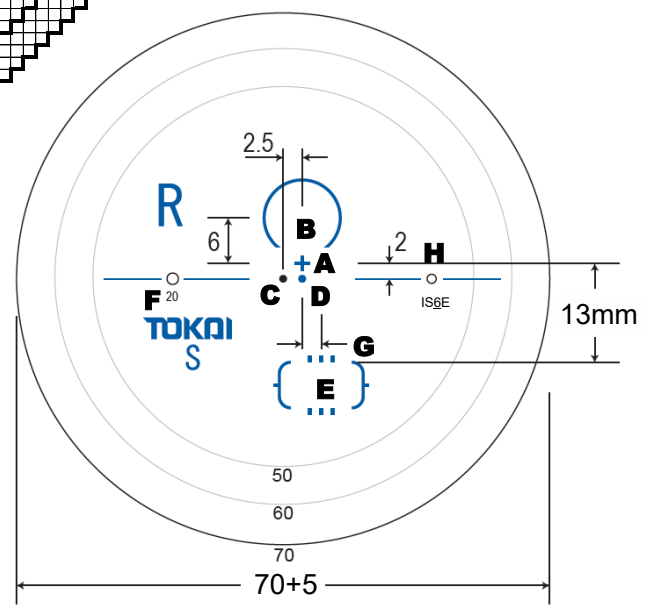


LTN EASYONE & LTN-P EASYONE 1.76, 1.67, 1.60

LTN EASYONE 1.50

※In case of with prism, the lens may be a cataract lens depending on the power

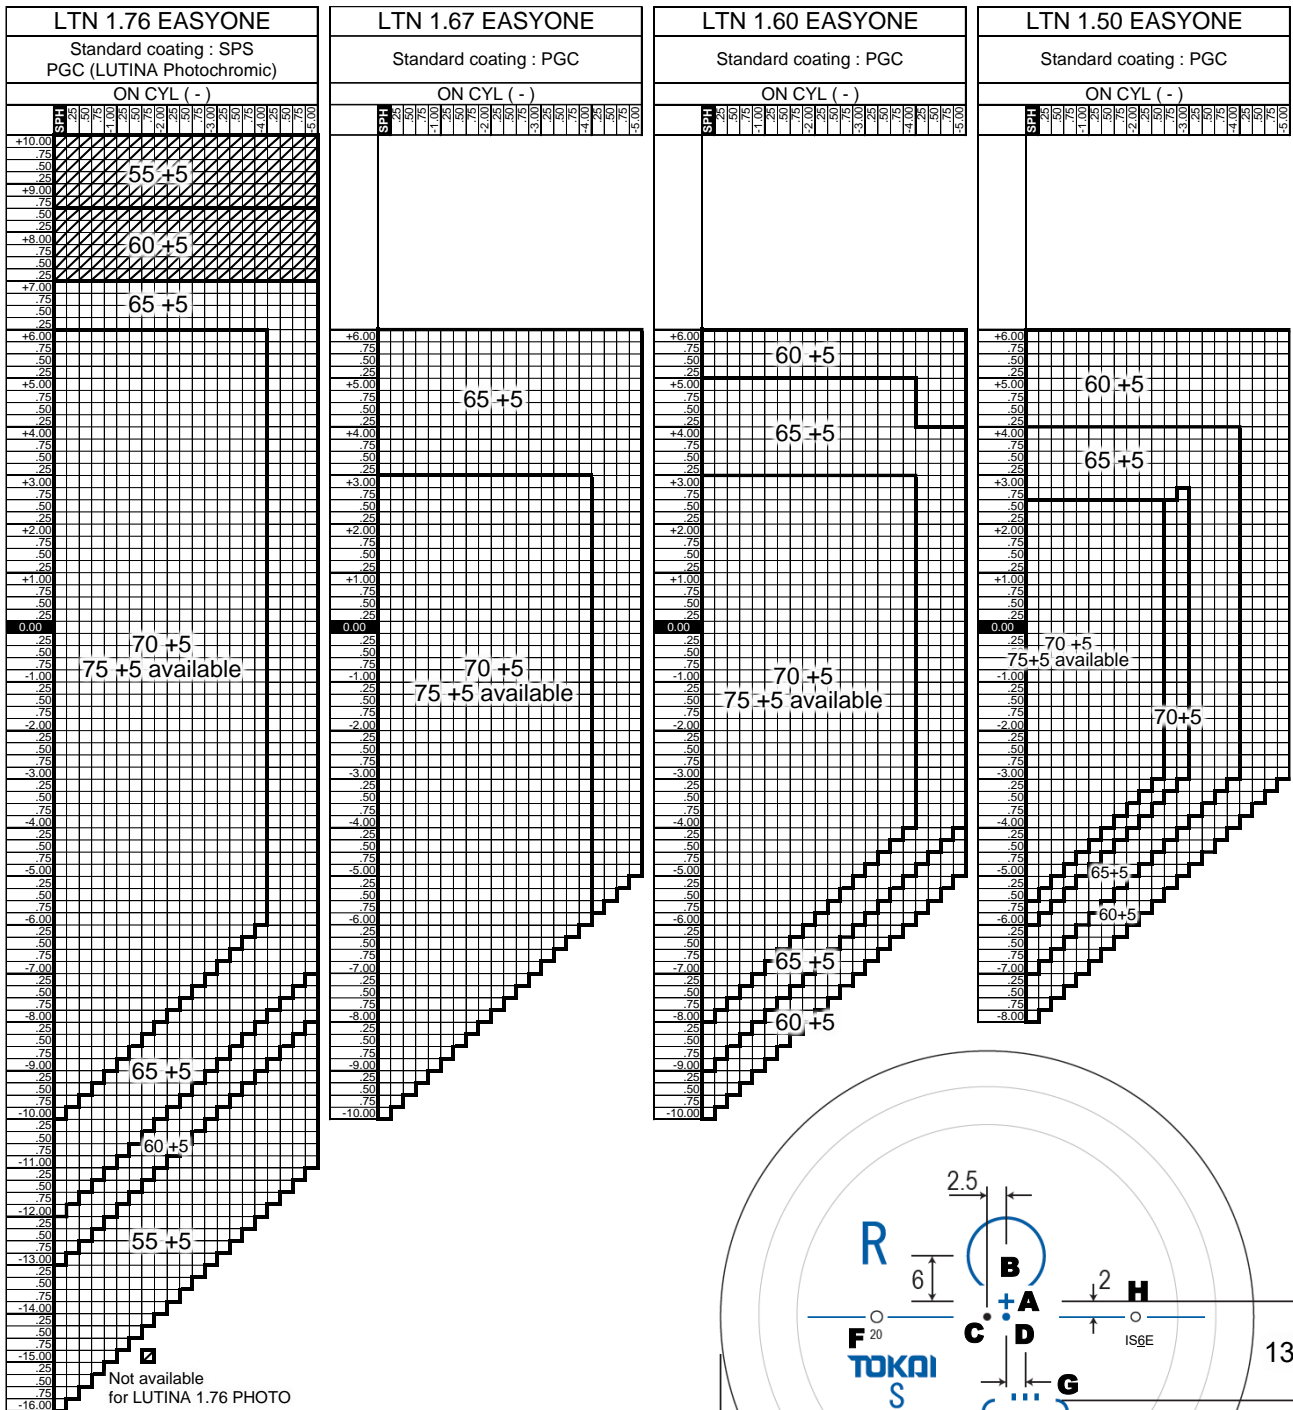

Specifications	Specifiable range / Availability	
Prescription	Size reduction	by 50mm Min : only (+), 1mm step
	Prism	Up to 3 prism
	Decentration	Not available
	Base curve selection	Available (Please refer "Curve" page)
Progressive	Color	Available (Please refer "available color list")
	LUTINA Photochromic	Gray, Brown, Only for LTN-P 1.60 Surf Blue
	Corridor	11,12,13mm
	Addition	0.50D to 4.00D at 0.25 steps
Individual	Inset	0.0 to 5.0 mm at 0.1 mm steps
	Wrap angle (Default value: 0.0°)	0.0° ~ 15.0° (0.1°steps)
Frame data	Slice (Frame shape required)	Available for plus & mixed power lenses
	Remote edging	Available (Wrap angle more than 11° is not available, Base curve more than 6 in minus range is not available.)
	Fine edge processing	Available (Less S+C = -3.00 : Not available) INDEX 1.50 is not available.

Product mark			
I	N	11mm	Z 1.76
	T	12mm	7 1.70
	S	13mm	6 1.60
			5 1.50

Lens mark	
A	Fitting point (far vision eye point)
B	Area to measure the far vision power
C	Geometrical center
D	Area to measure the prismatic power
E	Area to measure the near vision power
F	Addition
G	Inset (0.0 to 5.0 mm at 0.1 mm steps)
H	Identification and location mark