
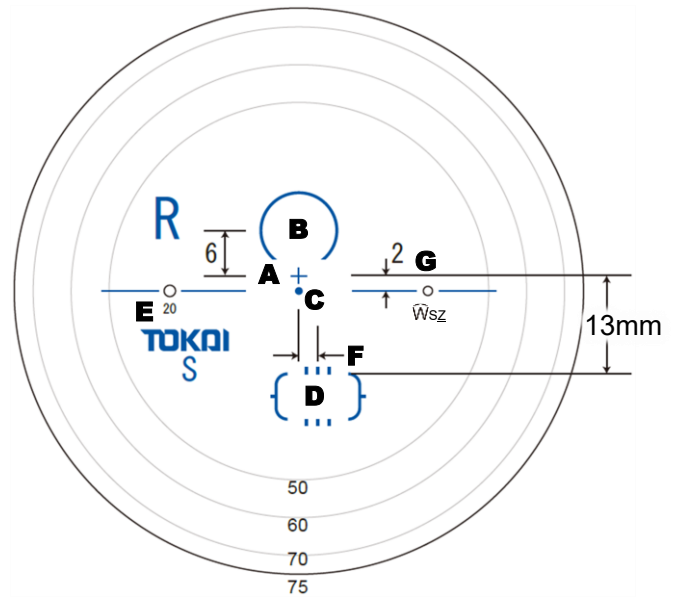
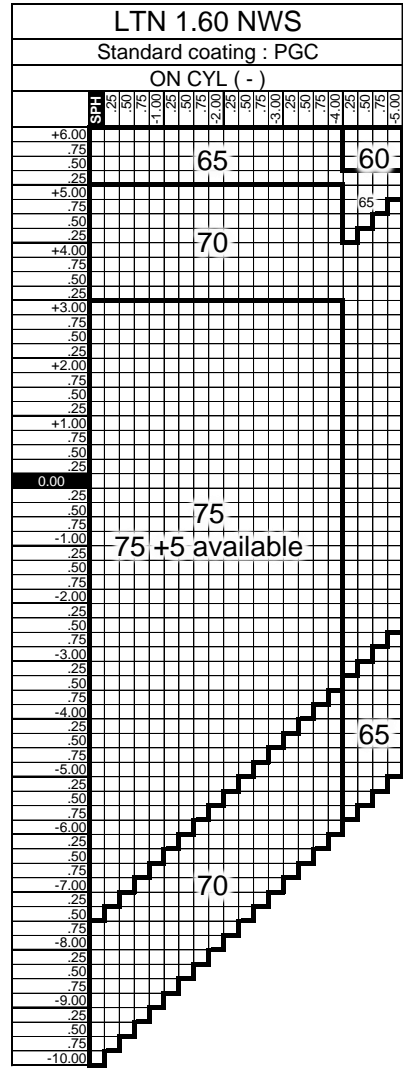
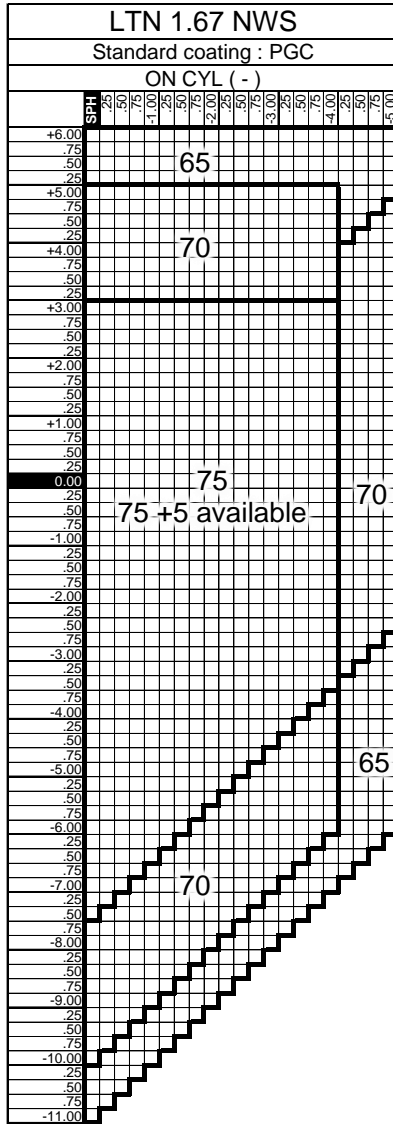


LUTINA NWS

※ In case of with prism, the lens may be a cataract lens depending on the power

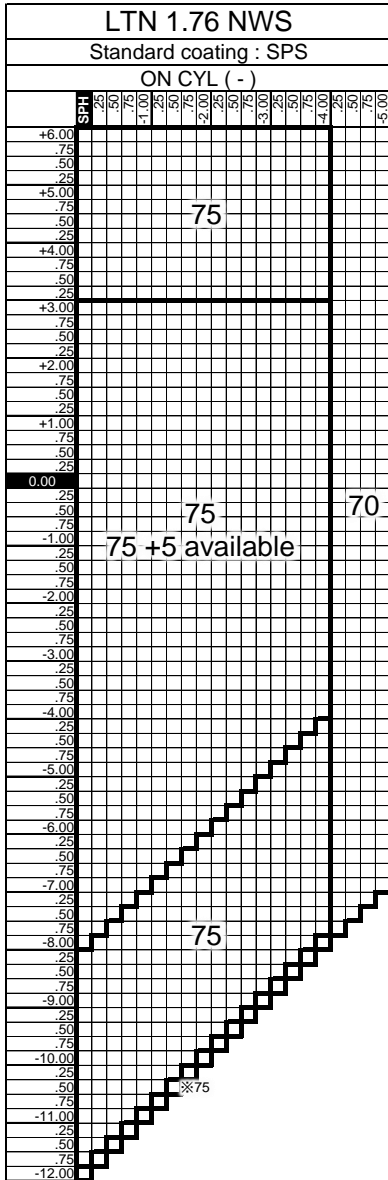

Specifications	Specifiable range / Availability
Size reduction	by 50mm Min : only (+), 1mm step
Prism	Up to 3 prism
Decentration	Not available
Base curve selection	Not available
LUTINA Photochromic	Gray, Brown
Corridor	11,12,13,14,15mm
Addition	0.50D to 4.00D at 0.25 steps
Inset	0.0 to 5.0 mm at 0.1 mm steps
Inset design from other elements	Designed by far PD, power, reading distance,
Reading distance can be prescribed	25cm to 80cm at 1cm steps
Slice (Frame shape required)	Available for plus & mixed power lenses
Fine edge processing	Available (Less S+C = -3.00 :Not available)

Product mark	Corridor	Index
W	N 11mm	Z 1.76
	T 12mm	Z 1.70
	S 13mm	E 1.60

Lens mark	
A	Fitting point (far vision eye point)
B	Area to measure the far vision power
C	Geometrical center
D	Area to measure the near vision power
E	Addition
F	Inset (0.0 to 5.0 mm at 0.1 mm steps)
G	Identification and location mark