

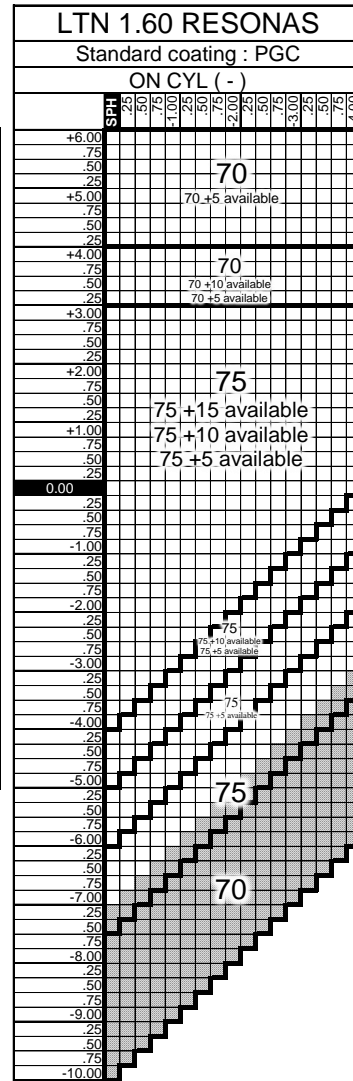
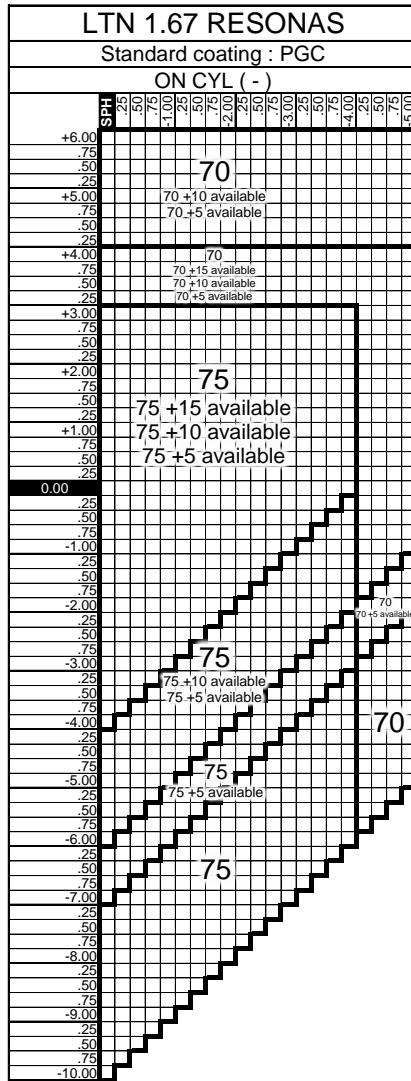


LUTINA RESONAS

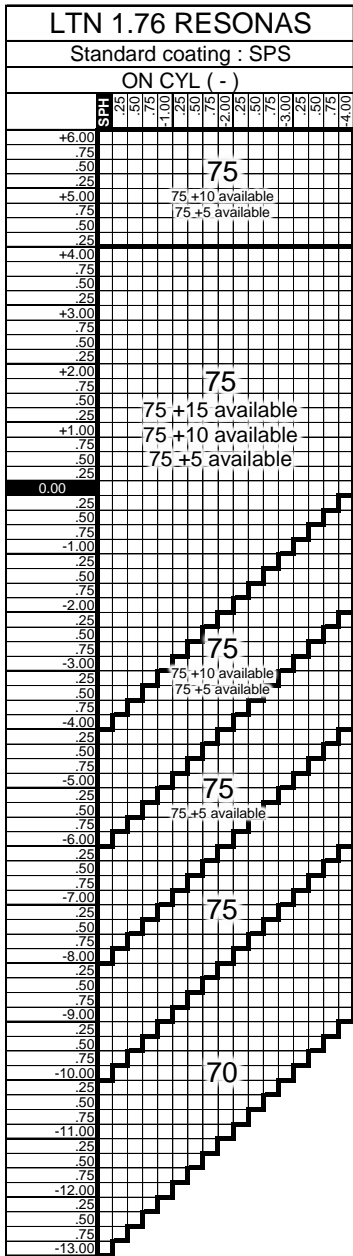

※In case of with prism, the lens may be a cataract lens depending on the power prescribed

Guide for available diameter	
• 75 +15 available = 75mm+ 7.5mm decenteration, Effective diameter: 90mm	
• 75 +10 available = 75mm+ 5.0mm decenteration, Effective diameter: 85mm	
• 75 +5 available = 75mm+ 2.5mm decenteration, Effective diameter: 80mm	
• 70 +10 available = 70mm+ 5.0mm decenteration, Effective diameter: 80mm	
• 70 +5 available = 70mm+ 2.5mm decenteration, Effective diameter: 75mm	
Note: LUTINA Photochromic type is not available decenteration option.	

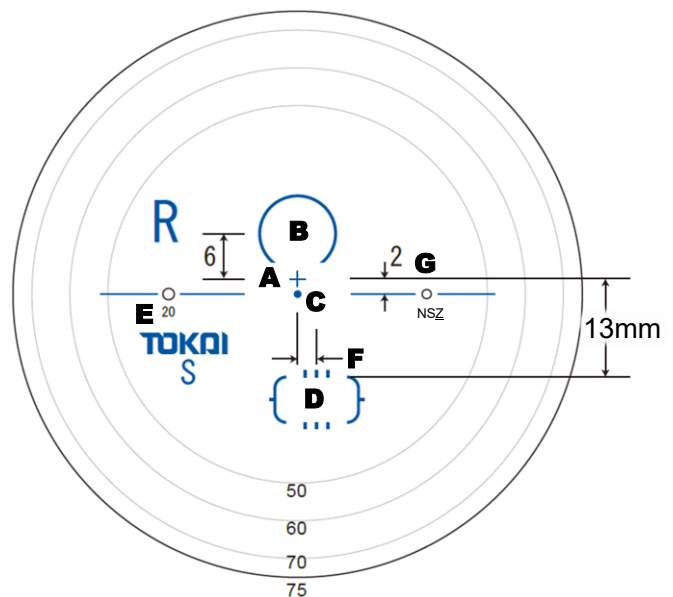

Specifications	Specifiable range / Availability
Size reduction	by 50mm Min : only (+), 1mm step
Prism	Up to 3 prism
Decenteration	Not available
Base curve selection	Available
LUTINA Photochromic	Gray, Brown, Only for LTN-P 1.60 Surf Blue
Corridor	11,13,15mm MT: 11,12,13,14,15mm
Addition	0.50D to 4.00D at 0.25 steps
Inset	0.0 to 5.0 mm at 0.1 mm steps
Inset design from other elements	Designed by far PD, power, reading distance,
Reading distance can be prescribed	25cm to 80cm at 1cm steps
Slice (Frame shape required)	Available for plus & mixed power lenses
Mytune design	Available
Fine edge processing	Available (Less S+C = -3.00 : Not available)

Product mark	Corridor	Index
N	11mm	Z 1.76
MT	T ※12mm	Z 1.70
	S 13mm	G 1.60
※Only for MT	E ※14mm	S 1.50
	R 15mm	

Lens mark	
A	Fitting point (far vision eye point)
B	Area to measure the far vision power
C	Geometrical center
D	Area to measure the near vision power
E	Addition
F	Inset (0.0 to 5.0 mm at 0.1 mm steps)
G	Identification and location mark