
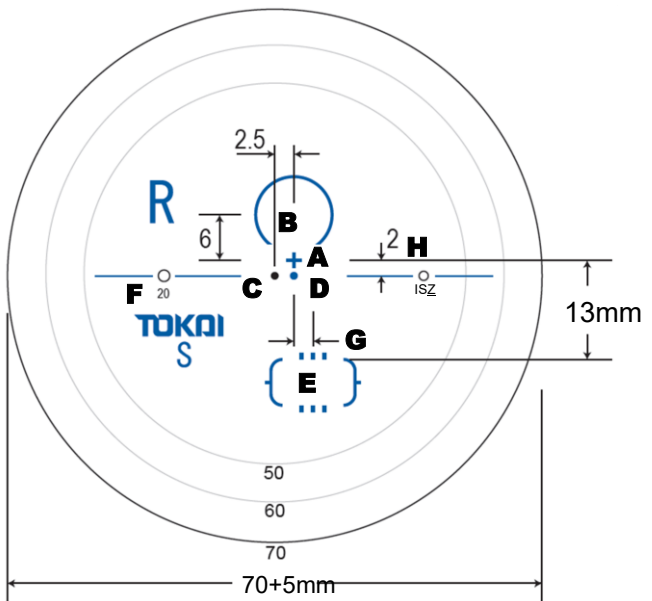
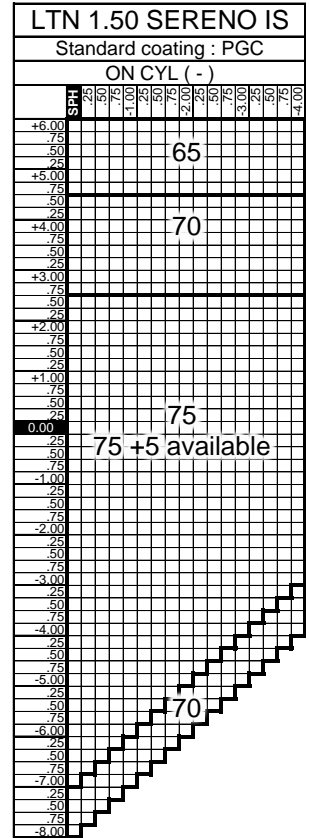
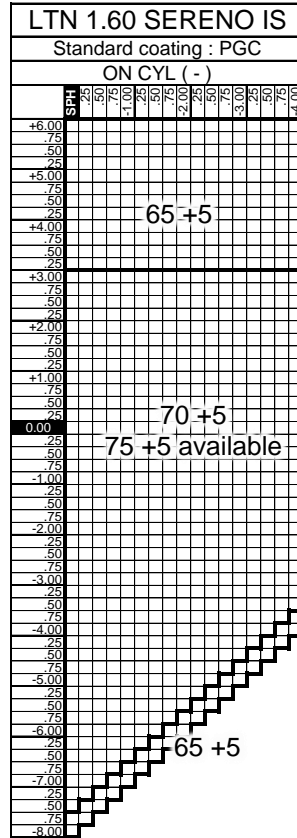
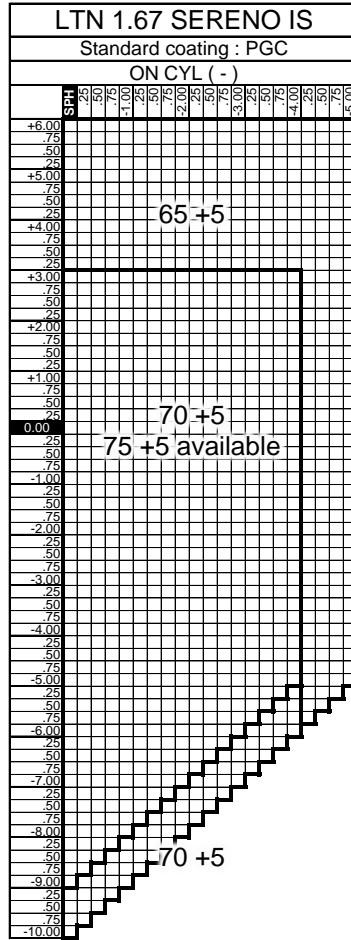


LUTINA SERENO IS

※In case of with prism, the lens may be a cataract lens depending on the power

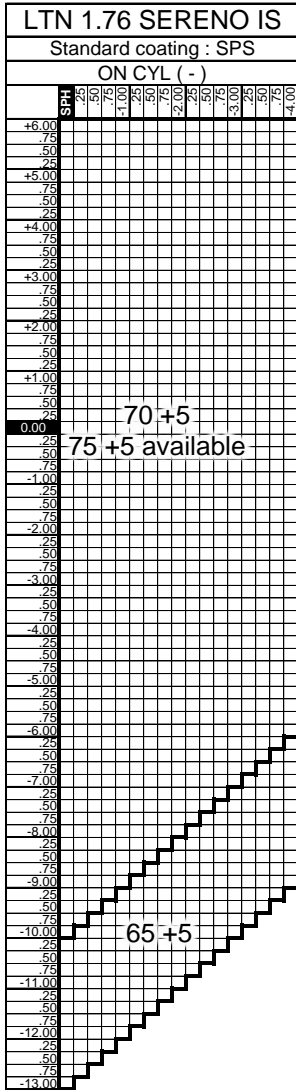

Specifications		Specifiable range / Availability
Prescription	Size reduction	by 50mm Min : only (+), 1mm step
	Prism	Up to 3 prism
	Decentration	Not available
	Base curve selection	Available
	LUTINA Photochromic	Gray, Brown, Only for LTN-P 1.60 Surf Blue
Progressive	Available coating & color for LTN 1.50	Coating: PGC, Option: PGC-P Color: SMOK, COPR, FORE, EXSLGY 85%, 75%, 50% Solid
	Corridor	11, 13mm
	Addition	0.50D to 4.00D at 0.25 steps
	Inset	0.0 to 5.0 mm at 0.1 mm steps
	Inset design from other elements	Designed by far PD, power, reading distance, Reading distance can be prescribed
Frame data	Slice (Frame shape required)	Available for plus & mixed power lenses

Lens mark	
A	Fitting point (far vision eye point)
B	Area to measure the far vision power
C	Geometrical center
D	Area to measure the prismatic power
E	Area to measure the near vision power
F	Addition
G	Inset (0.0 to 5.0 mm at 0.1 mm steps)
H	Identification and location mark

Product mark	Corridor	Index
I	N	Z 1.76
	S	U 1.67
		6 1.60
		5 1.50