
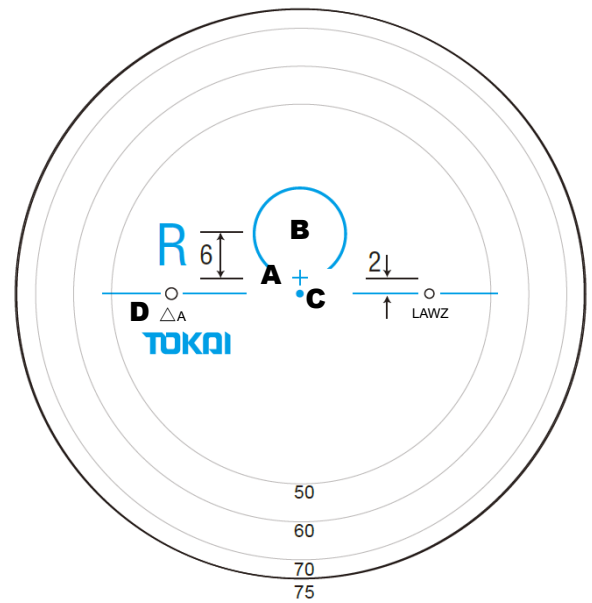


REST-W

※ In case of with prism, the lens may be a cataract lens depending on the power

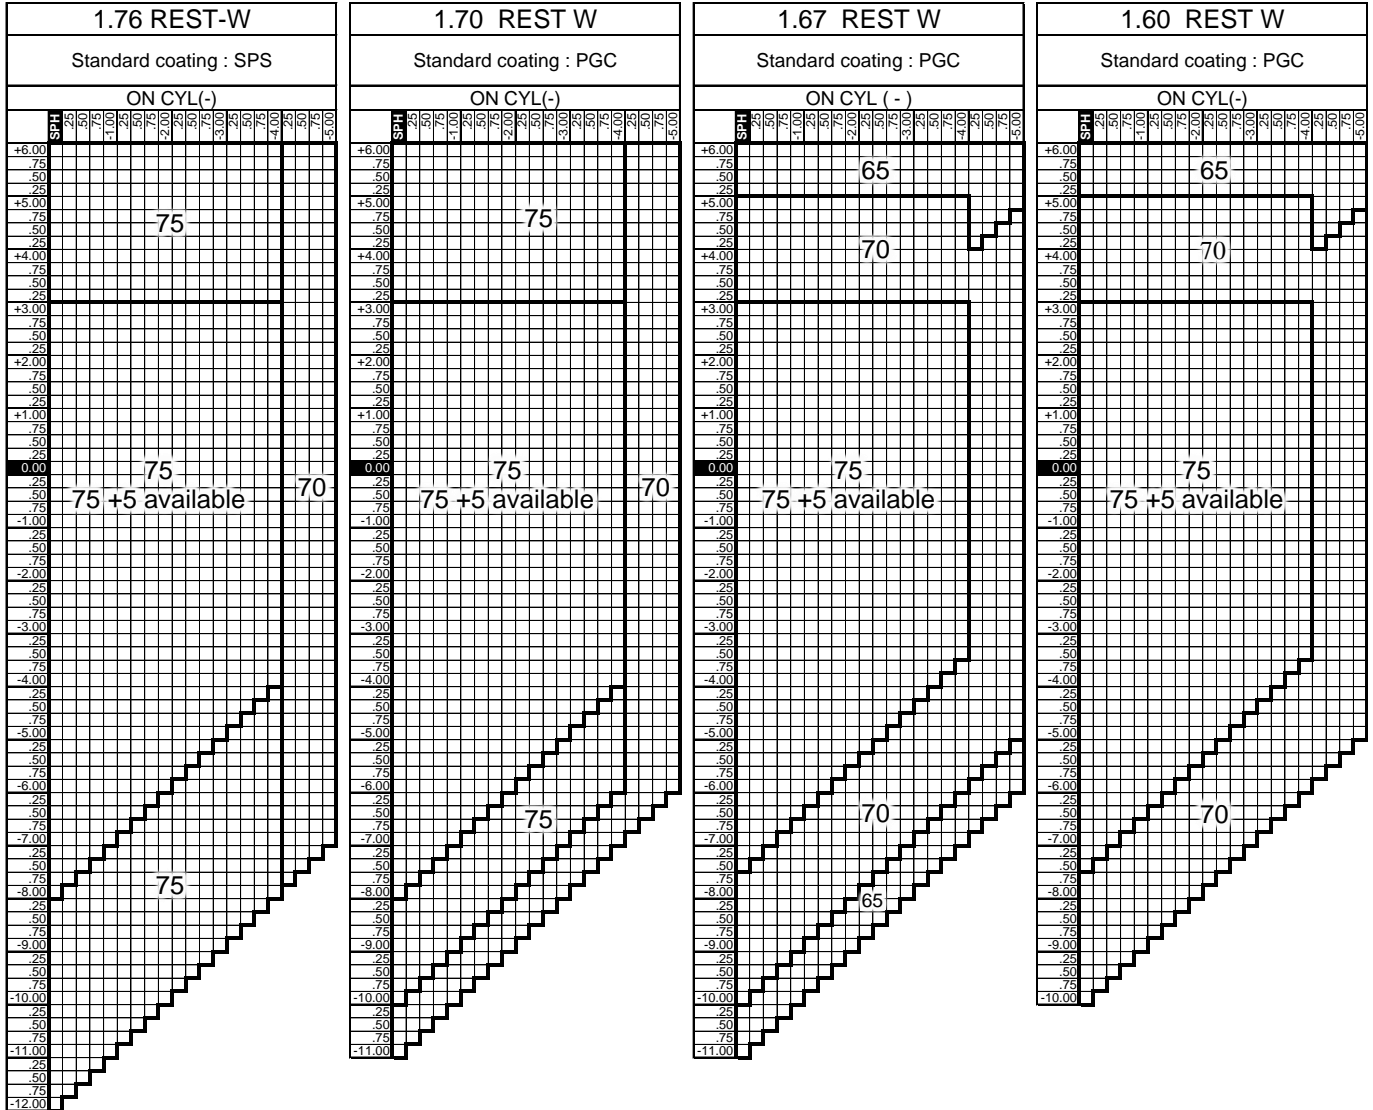

	Specifications	Specifiable range / Availability
Prescription	Size reduction	by 50mm Min : only (+), 1mm step
	Prism	Up to 3 prism
	Decentration	Not available
	Base curve selection	Not available
	Color	Available (Please refer "available color list")
Type	Eye assist	Type A: MAX +0.50D under fitting point Type B: MAX +0.75D under fitting point Type C: MAX +1.00D under fitting point Type D: MAX +1.25D under fitting point
Frame data	Slice (Frame shape required)	Available for plus & mixed power lenses
	Remote edging	Available
	Fine edge processing	Only available more than -3.00D. Some powers over -3.00D may not be applicable depending on the axis and addition power.

Product mark	Index	Type
LAW	Z 1.76	△A Type A
	7 1.70	△B Type B
	U 1.67	▽A Type C
	6 1.60	▽B Type D

Lens mark	
A	Fitting point (far vision eye point)
B	Area to measure the power
C	Geometrical center and prismatic power measurement point
D	Engraving mark