
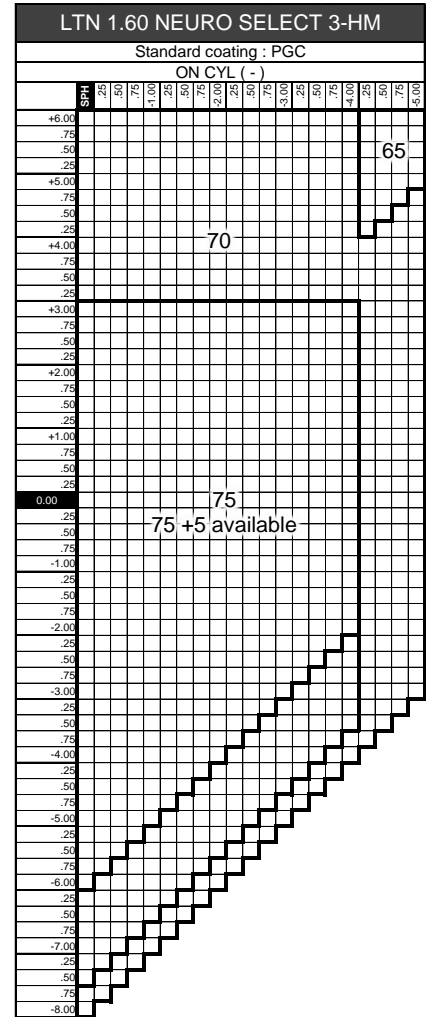
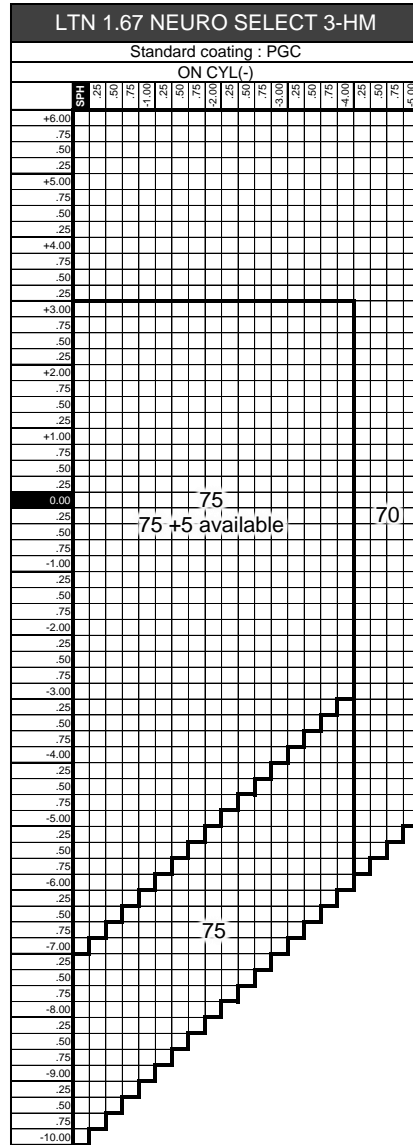


LTN NEURO SELECT 3-HM LTN-P NEURO SELECT 3-HM

LUTINA PHOTO
GY & BR & SB

Back-side progressive + Back-side aspheric design

※The lens may be a cataract lens depending on the power

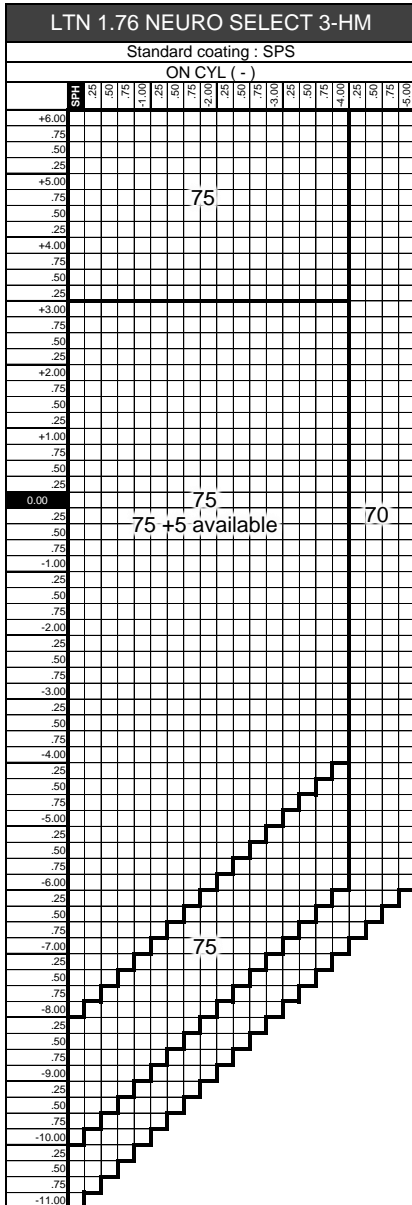


| | |
|----------|------------------------------|
| Corridor | 21,22,23mm |
| Addition | 1.00D to 3.50D at 0.25 steps |

| Color Name | Category Number | Visible Transmittance (%) | Capability for Driving | Capability for Driving at Night |
|--|-----------------|---------------------------|--------------------------|---------------------------------|
| LUTINA Photochromic Brown | 0/2 | 90/23 | <input type="checkbox"/> | <input type="checkbox"/> |
| LUTINA Photochromic Gray | 0/3 | 90/15 | <input type="checkbox"/> | <input type="checkbox"/> |
| LUTINA Photochromic Surf Blue Only for INDEX 1.60 | 0/1 | 92/53 | <input type="checkbox"/> | <input type="checkbox"/> |

| Option for MT, i, MTI | | |
|-----------------------|--|--|
| MT | Mytune | Frame shape information required. |
| i | Individual | Individual parameters can be specified. |
| MTI | Mytune & Individual | Frame shape information required. Individual parameters can be specified. |
| Individual parameters | Wrap angle (Default value: 0.0°) | 0.0° ~ 15.0° (0.1° steps) |
| | Tilt angle (Default value: 8.0°) | -5.0° ~ 25.0° (0.1° steps) |
| | Vertex distance (Default value: 12.0mm) | 8.0mm ~ 25.0mm (0.1mm steps) |

| | | |
|------------------|------------------------------------|---|
| Inset | Inset | 0.0 to 5.0 mm at 0.1 mm steps |
| | Inset design from other elements | Designed by far PD, power, reading distance, wrap angle, tilt angle and vertex distance |
| Reading distance | Reading distance can be prescribed | 25cm to 80cm at 1cm steps |

| | Specifications | Specifiable range / Availability |
|--------------|---------------------------------|---|
| Prescription | Size reduction | by 50mm Min : only (+), 1mm step |
| | Prism | Up to 3 prism |
| | Decentration | Not available |
| | Base curve selection | Available |
| Frame data | Slice (Frame shape required) | Available for plus & mixed power lenses |
| | Remote edging | Available |
| | Fine edge processing | Only available more than -3.00D. Some powers over -3.00D may not be applicable depending on the axis and addition power. |

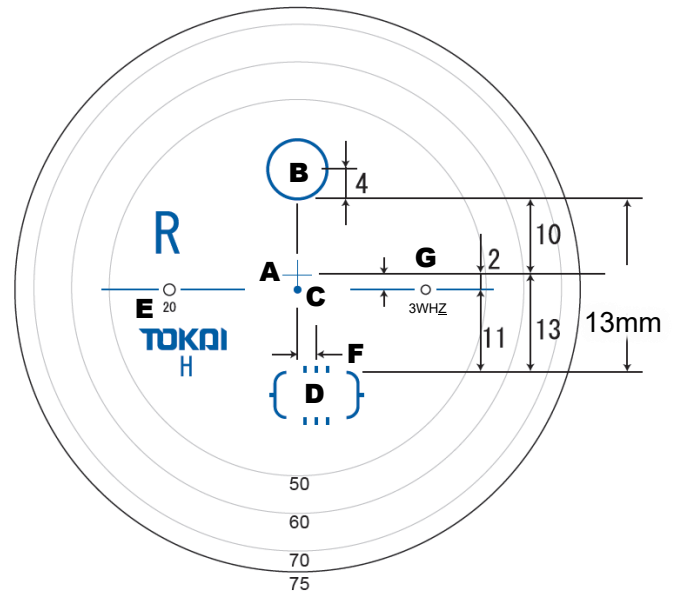

| Design & Option | Corridor | Index |
|-----------------|----------|------------------|
| 3 | W: Wide | L 21mm Z 1.76 |
| 3 (MT) | L: Long | I 22mm U 1.67 |
| 3 (i) | | H 23mm G 1.60 |
| 3 (MTI) | | |

| Lens mark | |
|-----------|---------------------------------------|
| A | Fitting point (far vision eye point) |
| B | Area to measure the far vision power |
| C | Geometrical center |
| D | Area to measure the near vision power |
| E | Addition |
| F | Inset (0.0 to 5.0 mm at 0.1 mm steps) |
| G | Identification and location mark |