
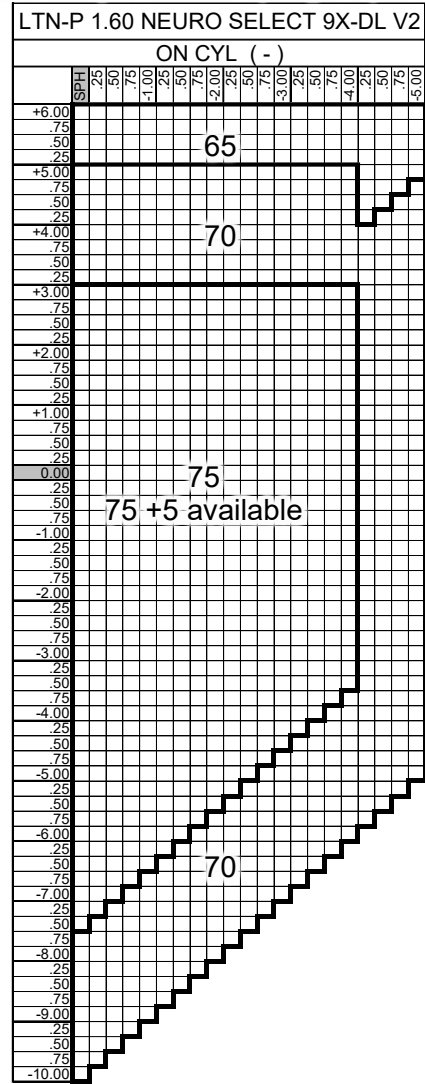
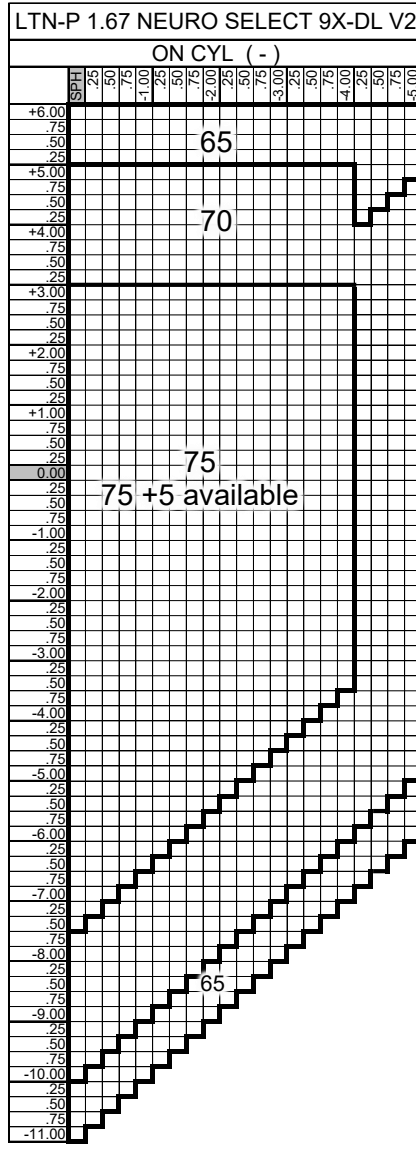


LTN-P NEURO SELECT 9X-DL V2

※The lens may be a cataract lens depending on the power

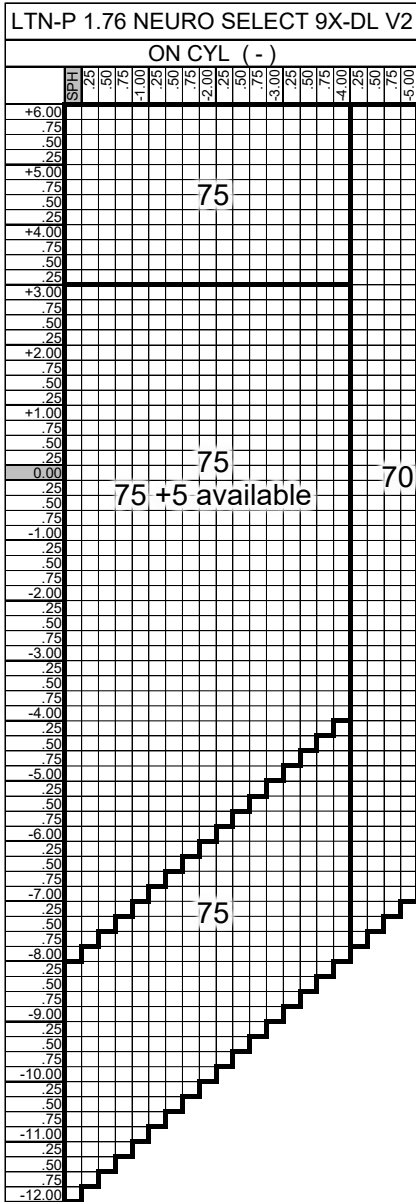

Corridor	11,12,13,14,15,16,17mm
Addition	0.50D to 4.00D at 0.25 steps
Design type	Mild, Clear, New Balance, Wide


Photochromic color	Category Number	Visible Transmittance (%)	Capability for Driving	Capability for Driving at Night
LUTINA PHOTO Brown Version2	0/3	90/13	○	○
LUTINA PHOTO Gray Version2	0/3	89/11	○	○
LUTINA PHOTO Blue Version2	0/2	92/21	○	○
LUTINA PHOTO Green Version2	0/3	90/13	○	○

※Blue and Green are compatible with 1.67 and 1.60, but not 1.76.

Frame shape information must be required.		
Individual parameters	Wrap angle (Default value: 0.0°)	0.0° ~ 15.0° (0.1° steps)
	Tilt angle (Default value: 8.0°)	-5.0° ~ 25.0° (0.1° steps)
	Vertex distance (Default value: 12.0mm)	8.0mm ~ 25.0mm (0.1mm steps)

Inset	Inset	0.0 to 5.0 mm at 0.1 mm steps
	Inset design from other elements	Designed by far PD, power, reading distance, wrap angle, tilt angle and vertex distance
Reading distance	Reading distance can be prescribed	25cm to 80cm at 1cm steps

Specifications		Specifiable range / Availability	
Prescription	Size reduction	by 50mm Min : only (+), 1mm step	
	Prism	Up to 3 prism	
	Decentration	Not available	
	Base curve selection	Available	
	Slice (Frame shape required)	Available for plus power lenses	
Frame data	Remote edging	Available	
	Fine edge processing	Not available	

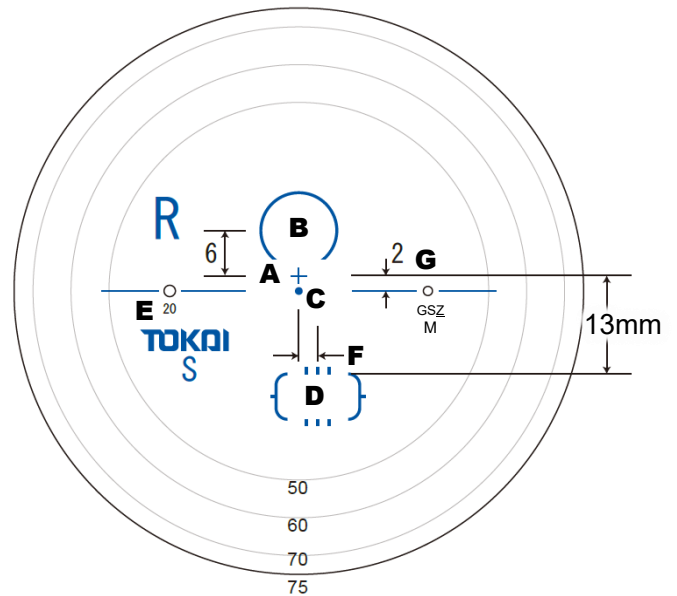

Product mark	Corridor	Index	Type
G	N 11mm	Z 1.76	M Mid
	T 12mm	U 1.67	C Clear
	S 13mm	E 1.60	N New Balance
	E 14mm		W Wide
	R 15mm		
	U 16mm		
	F 17mm		

Lens mark	
A	Fitting point (far vision eye point)
B	Area to measure the far vision power
C	Geometrical center
D	Area to measure the near vision power
E	Addition
F	Inset (0.0 to 5.0 mm at 0.1 mm steps)
G	Identification and location mark